



WHEN THINGS GET ROUGH

INTER VINE REMOVER



INTER VINE HYDRAULIC BLADE WEED REMOVER WITH SENSOR

Tool for inter vine weed remover. It need for one hydraulic line and no oil tank. Oil flow valve and electrical emergency stop button for faster opening. It allows work in very young vineyards. It can be mounted to any plough or rotary mulchers. Right and left models available



HYDRAULIC INTER VINE WEED REMOVER

Tool for inter vine weed remover. It need for one hydraulic line and no oil tank. It can be mounted to any plough or rotary mulchers. It works by a return spring with hydraulic adjustment. Recommended in vineyards of at least 4 years. Can be used also in presence of not perfect vertical trunks. It need for one hydraulic line and no oil tank. Right and left models available



MECHANICAL INTER VINE WEED REMOVER

Tool for inter vine weed remover. It can be mounted to any plough or rotary mulchers. It works by a return spring with mechanical adjustment. Recommended in vineyards of at least 4 years. Can be used also in presence of not perfect vertical trunks. No needs for hydraulic components. Right and left models available



ROTATIVE INTER VINE WEED REMOVER

Tool for inter vine weed remover. It need for one hydraulic line and no oil tank. It can be mounted to any plough or rotary mulchers. It works by a return spring with hydraulic adjustment. Recommended in vineyards of at least 4 years. Can be used also in presence of not perfect vertical trunks. It need for one hydraulic line and no oil tank. Right and left models available






WHEN THINGS GET ROUGH

INTER VINE REMOVER


TECHNICAL DATA

IITAST - Inter vine hydraulic blade weed remover with sensor

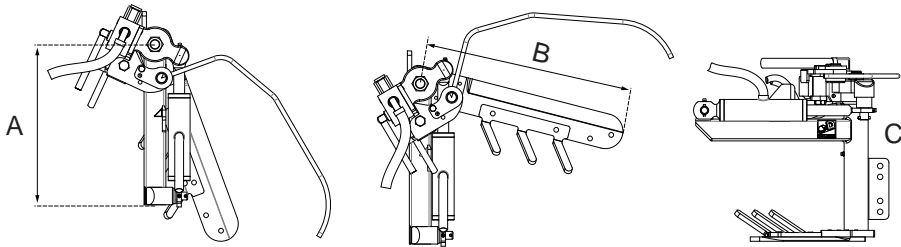


IITAST		Weight
A	mm. 390	Kg.26
B	mm. 480	
C	mm. 390	

IM - Mechanical inter vine weed remover.

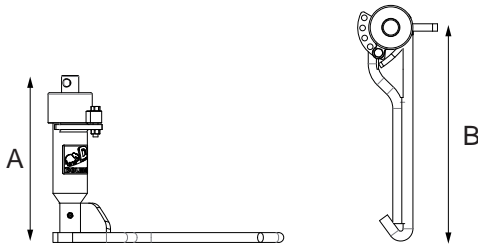


IM		Weight
A	mm. 350	Kg.12
B	mm. 460	

IID - Hydraulic inter vine weed remover

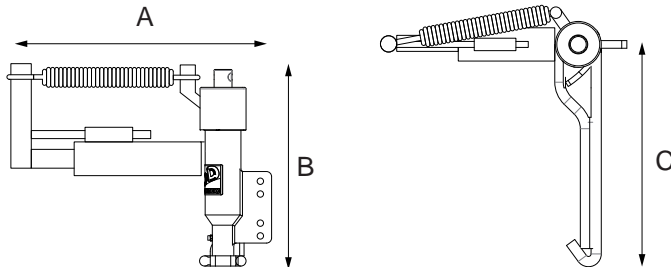

IID		Weight
A	mm. 450	Kg.18
B	mm. 480	
C	mm. 460	

IR - Rotative inter vine weed remover

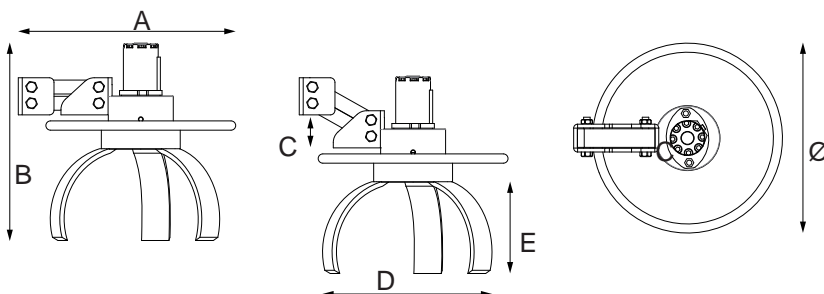

IID		Weight
A	mm. 440	Kg.60
B	mm. 400	
C	mm. 70	
D	mm. 290	
E	mm. 140	
Ø	mm. 400	

authorized dealer:



Modification can be appornted without advice.