



WHEN THINGS GET ROUGH

## VINEDISC "VARIO"




### HYDROPNEUMATIC DISC HARROW "VINEDISC VARIO"

Agricultural minimum work disc harrow is built in structural square tube specially developed for vineyard. The frame is equipped with anchors in Hardox consisting of a unique piece without welded parts. Low fuel consumption thanks to lower power demand. It can work in any soil condition thanks to the possibilities to change hydraulically the distance between front and rear disc assembly and angle of attack. Work width can be modified adding further harrow body. Safety high resistance bolts to prevent anchors damage. Additional holes at lateral side make attaching other equipment easy.


The frame can be overturned for easily changing of the rows. No-Stop system hydraulic cylinders without pilot boss in unique piece without welded parts.

Convertible into vineyards plough with no-stop safety system.

### HYDRO PNEUMATIC CULTIVATOR VINEDISC "VARIO" configuration change possible

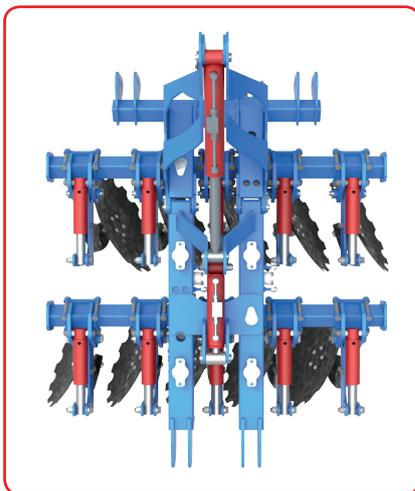


distance between front  
and rear element can be  
modified

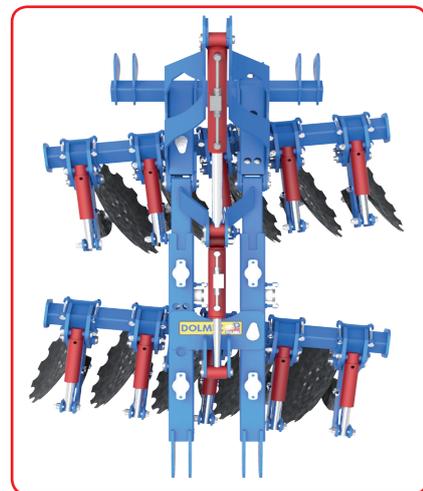


angle of attack changing 6°

TECHNICAL DATA

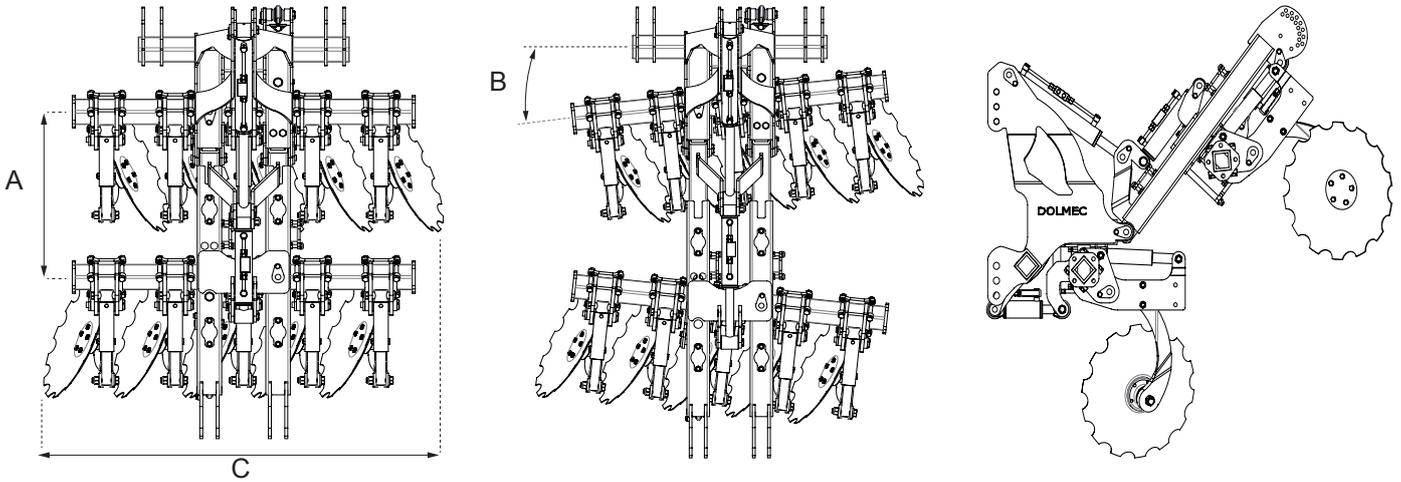

DISC HARROW "VINEDISC VARIO"			
Model	Description	VDV10 (10 elements)	VDV14 (14 elements)
A	distance between front and rear disc assembly	da 700 a 900 mm.	da 700 a 900 mm.
B	disc angle of attack	da 0° a 6°	da 0° a 6°
C	width	mm.1670	mm. 2230
WEIGHT		kg. 820	kg. 1060

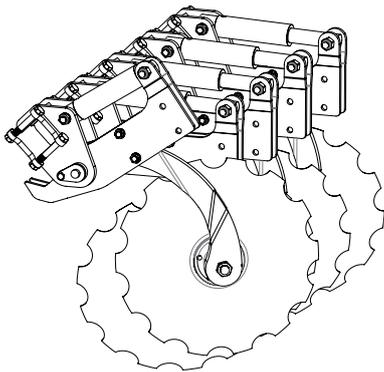

**HYDRAULICAL NO STOP SAFETY SYSTEM**

The hydropneumatic disc harrow Vinedisc Vario has a no-stop safety system. Every anchor has a cylinder fitted to an hydraulic system. The pressure is managed by a ball nitrogen accumulator with a regulator valve. It allows fast oil return allowing the anchors to overcome the obstacle with a gradual return to avoid kickback.



authorized dealer:



Modification can be appornted without advice.